

Performance Curve for Metering Pump


DATE	
CUSTOMER	
ITEM NO.	
PUMP MODEL	JLSPD6000

PUMP SPECIFICATIONS

MAX. CAPACITY		MAX. DIS. PRESSURE	STROKE RATE	CONNECTION	
60 Hz	7,000 cc/min.	90 kgf/cm ²	114 spm	Suction	KS 10K 20A FF
50 Hz	5,800 cc/min.		95 spm	Discharge	KS 63K 20A RF

MOTOR SPECIFICATIONS

PHASE	FREQ.	VOLTAGE	POLES	OUTPUT	RATED CURRENT	INS. CLASS	PROT'N GRADE
3	60Hz	220/380V	4	1.5kW	6.1/3.53A	F	IP55
MAKER		SIEMENS		TEST CONDITION		FOR WATER 20°C & 1.0S.G.	

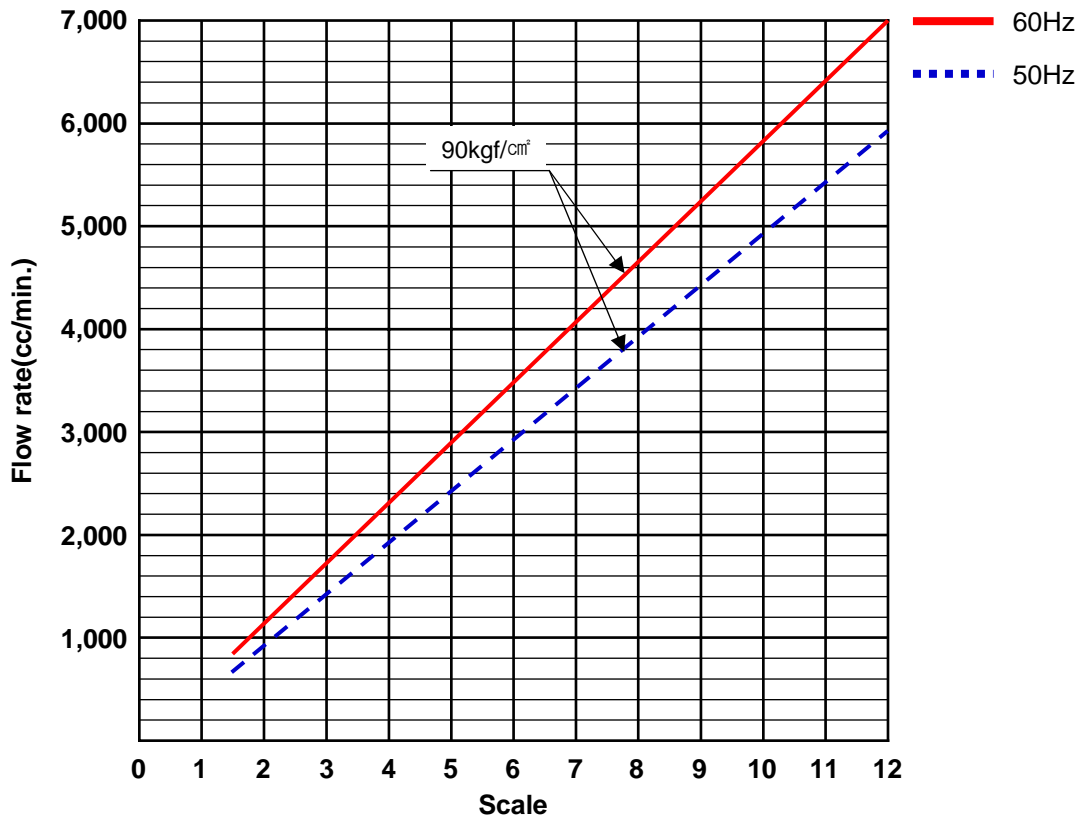

PREPARED BY	CHECKED BY	APPROVED BY	REV. No.	REVISED BY	CHECKED BY	APPROVED BY
H. J. SEO	W. PARK	S. C. KIM				



E-WHA CHEMICAL FEEDER CO., LTD.
주식회사이화정량펌프

2Da-606, Shihwa Industrial Complex, 1264-5,
Tel. +82-31-432-8787
E-mail : ewhapump@ewhapump.com

Jung wang-Dong, Shihung City, Kyung Ki-Do, Korea 429-450
Fax. +82-31-432-4071
URL <http://www.ewhapump.com>