

# Performance Curve for Metering Pump


DATE \_\_\_\_\_  
 CUSTOMER \_\_\_\_\_  
 ITEM NO. \_\_\_\_\_  
 PUMP MODEL **JM100**

## PUMP SPECIFICATIONS

MAX. CAPACITY		MAX. DIS. PRESSURE	STROKE RATE	CONNECTION	
60 Hz	150 cc/min.	10 kgf/cm <sup>2</sup>	111 spm	Suction	KS 10K 15A FF
50 Hz	125 cc/min.		95 spm	Discharge	KS 10K 15A FF

## MOTOR SPECIFICATIONS

PHASE	FREQ.	VOLTAGE	POLES	OUTPUT	RATED CURRENT	INS. CLASS	PROT'N GRADE
3	60Hz	220/380V	4	0.37kW	1.94/1.12A	F	IP55
MAKER		SIEMENS		TEST CONDITION		FOR WATER 20°C & 1.0S.G.	

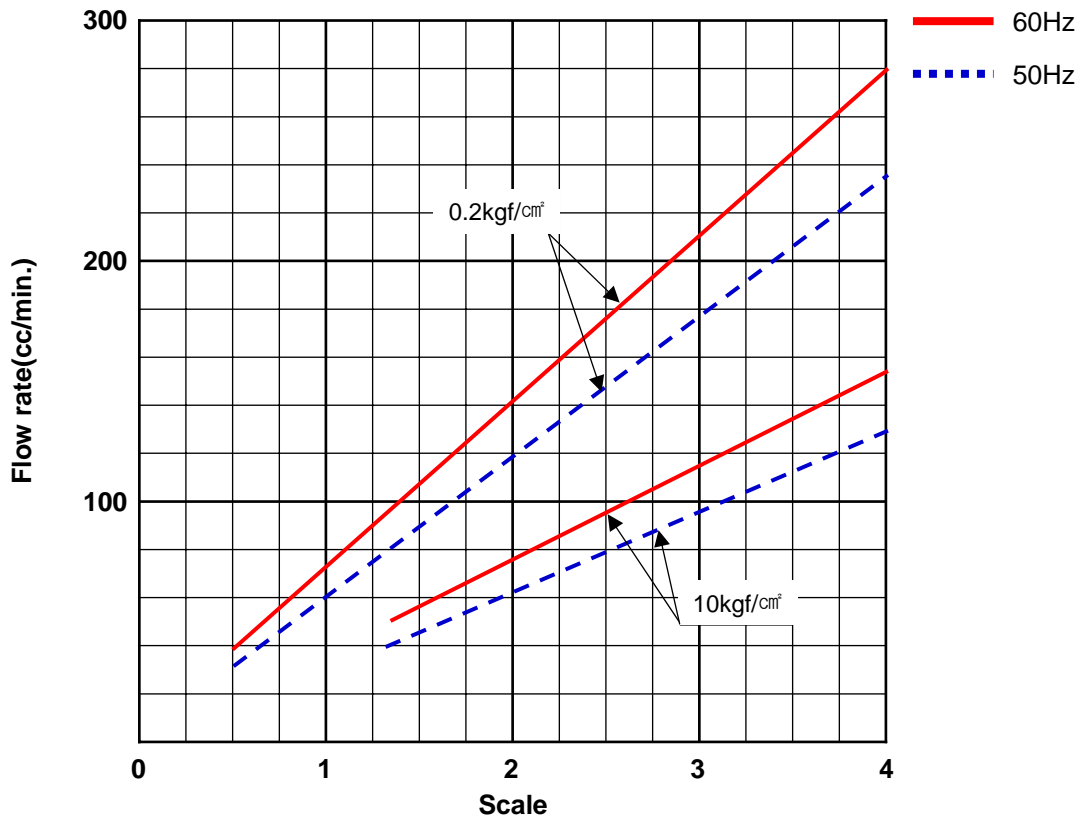

PREPARED BY	CHECKED BY	APPROVED BY	REV. No.	REVISED BY	CHECKED BY	APPROVED BY
W. PARK	W. PARK	S. C. KIM				



**E-WHA CHEMICAL FEEDER CO., LTD.**  
 주식회사 이화정량펌프

26-6, Seoneup-ri, Janghowon-eup, Icheon-City, Kyung Ki-Do, Korea 467-904  
 Tel. +82-31-642-8000 Fax. +82-31-642-4071  
 E-mail : ewhapump@ewhapump.com URL http://www.ewhapump.com