

Performance Curve for Metering Pump


| | |
|------------|----------|
| DATE | |
| CUSTOMER | |
| ITEM NO. | |
| PUMP MODEL | JMBV3000 |

PUMP SPECIFICATIONS

| MAX. CAPACITY | | MAX. DIS. PRESSURE | STROKE RATE | CONNECTION | |
|---------------|---------------|-----------------------|-------------|------------|---------------|
| 60 Hz | 3,300 cc/min. | 5 kgf/cm ² | 111 spm | Suction | KS 10K 20A FF |
| 50 Hz | 2,700 cc/min. | | 95 spm | Discharge | KS 10K 20A FF |

MOTOR SPECIFICATIONS

| PHASE | FREQ. | VOLTAGE | POLES | OUTPUT | RATED CURRENT | INS. CLASS | PROT'N GRADE |
|-------|-------|----------|-------|----------------|---------------|--------------------------|--------------|
| 3 | 60Hz | 220/380V | 4 | 0.37kW | 1.94/1.12A | F | IP55 |
| MAKER | | SIEMENS | | TEST CONDITION | | FOR WATER 20°C & 1.0S.G. | |

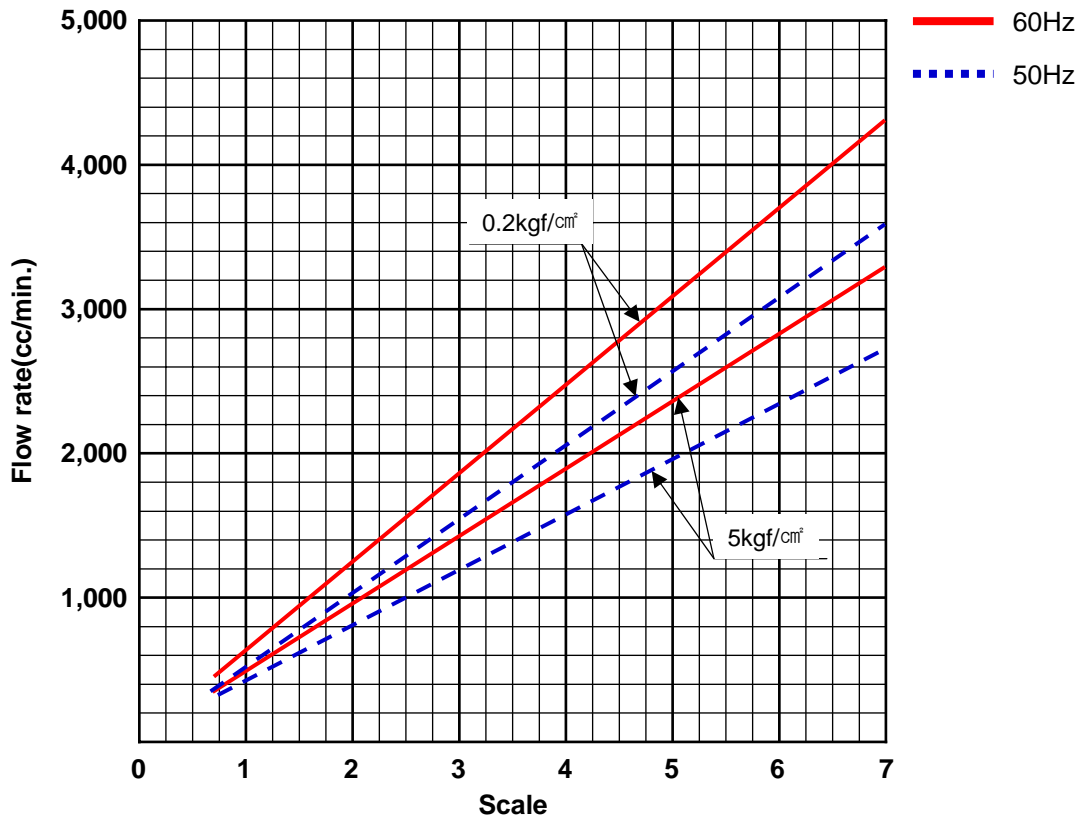

| PREPARED BY | CHECKED BY | APPROVED BY | REV. No. | REVISED BY | CHECKED BY | APPROVED BY |
|-------------|------------|-------------|----------|------------|------------|-------------|
| W. PARK | W. PARK | S. C. KIM | | | | |



E-WHA CHEMICAL FEEDER CO., LTD.

주식회사 이화정량펌프

26-6, Seoneup-ri, Janghowon-eup, Icheon-City, Kyung Ki-Do, Korea 467-904

Tel. +82-31-642-8000

Fax. +82-31-642-4071

E-mail : ewhapump@ewhapump.com

URL <http://www.ewhapump.com>