

Performance Curve for Metering Pump


DATE _____
 CUSTOMER _____
 ITEM NO. _____
 PUMP MODEL JLHN1000

PUMP SPECIFICATIONS

MAX. CAPACITY		MAX. DIS. PRESSURE	STROKE RATE	CONNECTION	
60 Hz	1,500 cc/min.	10 kgf/cm ²	111 spm	Suction	KS 10K 15A FF
50 Hz	1,250 cc/min.		95 spm	Discharge	KS 10K 15A FF

MOTOR SPECIFICATIONS

PHASE	FREQ.	VOLTAGE	POLES	OUTPUT	RATED CURRENT	INS. CLASS	PROT'N GRADE
3	60Hz	220/380V	4	0.75kW	3.3/1.9A	F	IP55
MAKER		SIEMENS		TEST CONDITION		FOR WATER 20°C & 1.0S.G.	

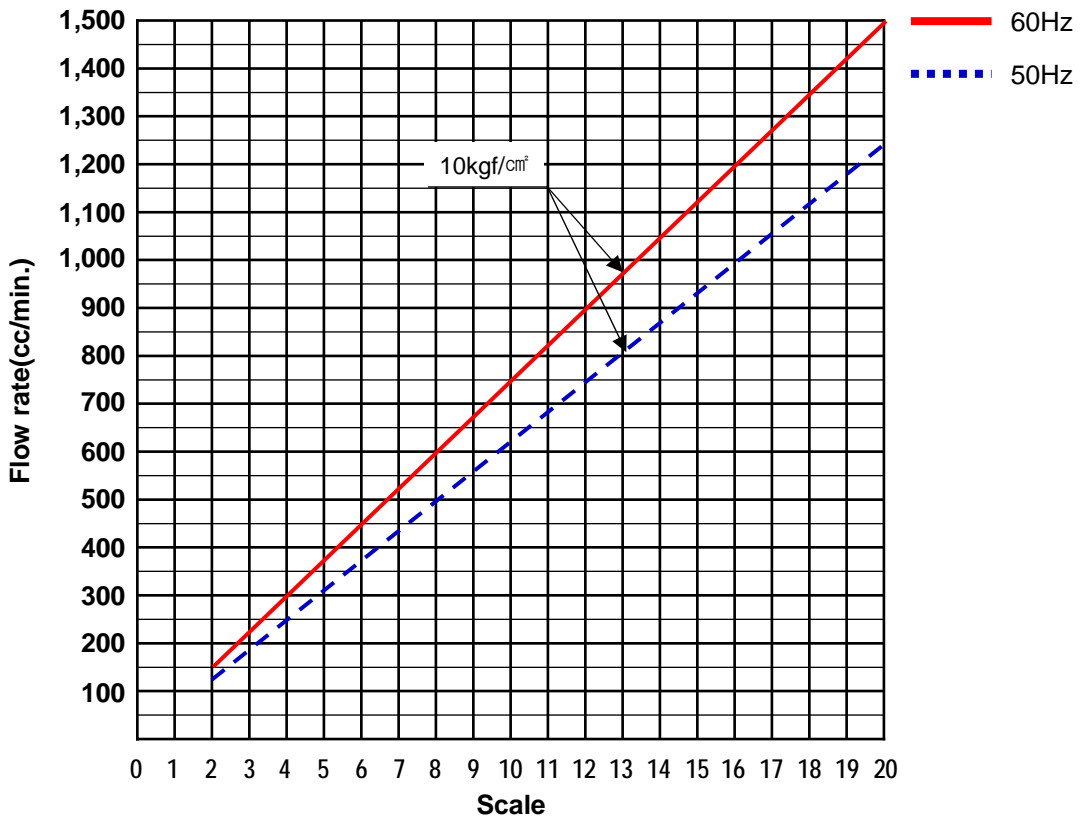

PREPARED BY	CHECKED BY	APPROVED BY	REV. No.	REVISED BY	CHECKED BY	APPROVED BY
W. PARK	W. PARK	S. C. KIM				



E-WHA CHEMICAL FEEDER CO., LTD.
 주식회사 이화정량펌프

26-6, Seoneup-ri, Janghownon-eup, Icheon-City, Kyung Ki-Do, Korea 467-904
 Tel. +82-31-642-8000 Fax. +82-31-642-4071
 E-mail : ewhapump@ewhapump.com URL http://www.ewhapump.com