

Performance Curve for Metering Pump


DATE	
CUSTOMER	
ITEM NO.	
PUMP MODEL	JMHN5000

PUMP SPECIFICATIONS

MAX. CAPACITY		MAX. DIS. PRESSURE	STROKE RATE	CONNECTION	
60 Hz	5,500 cc/min.	10 kgf/cm ²	111 spm	Suction	KS 10K 20A FF
50 Hz	4,500 cc/min.		95 spm	Discharge	KS 10K 20A FF

MOTOR SPECIFICATIONS

PHASE	FREQ.	VOLTAGE	POLES	OUTPUT	RATED CURRENT	INS. CLASS	PROT'N GRADE
3	60Hz	220/380V	4	0.75kW	3.3/1.9A	F	IP55
MAKER		SIEMENS		TEST CONDITION		FOR WATER 20°C & 1.0S.G.	

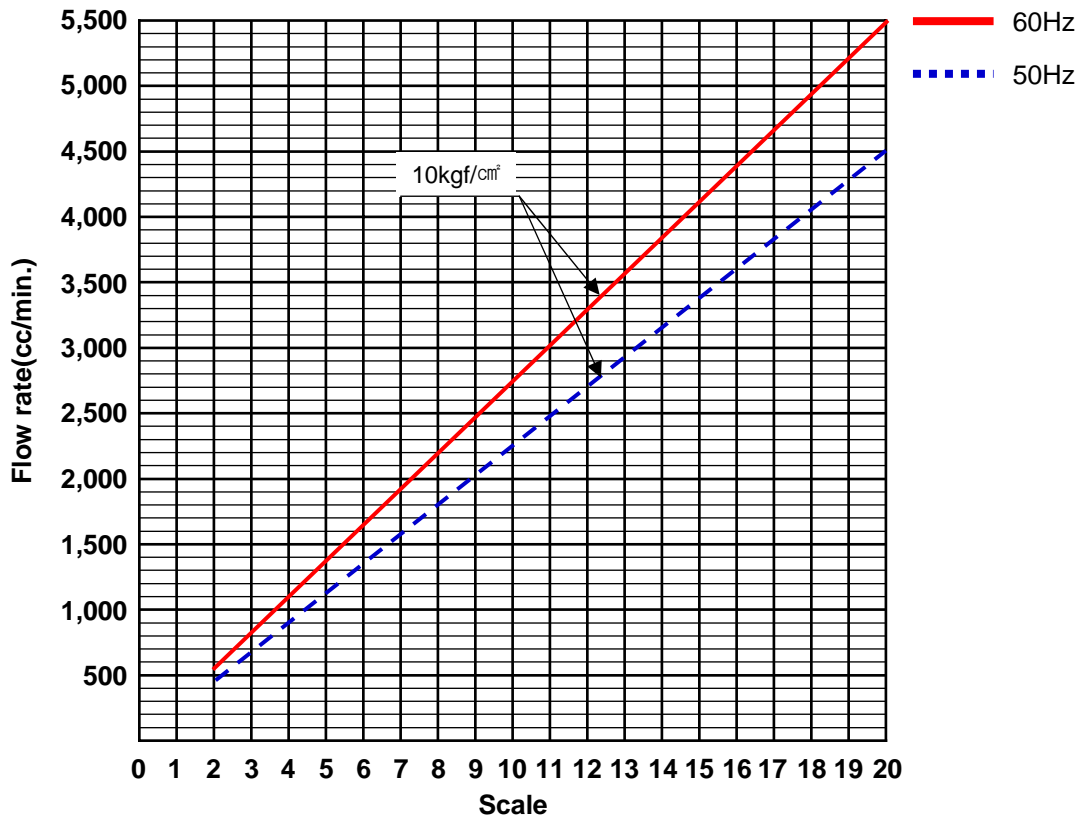

PREPARED BY	CHECKED BY	APPROVED BY	REV. No.	REVISED BY	CHECKED BY	APPROVED BY
W. PARK	W. PARK	S. C. KIM				



E-WHA CHEMICAL FEEDER CO., LTD.
주식회사이화정량펌프

2Da-606, Shihwa Industrial Complex, 1264-5,
Tel. +82-31-432-8787
E-mail : ewhapump@ewhapump.com

Jung wang-Dong, Shihung City, Kyung Ki-Do, Korea 429-450
Fax. +82-31-432-4071
URL <http://www.ewhapump.com>